



Report No.: STD160203NB-E

## LM-79-08 Test Report

For

**CEA GROUP INTERNATIONAL CO.,LTD**

**(Brand Name:CEA EAEC)**

Sanjiali Industrial Zone Zhucheng Road Panshi North baixiang Yueqing Zhejiang China

### Fuel Pump Canopy Luminaires

Model name(s): CNL5-30

Representative (Tested) Model: CNL5-30(2700K)  
CNL5-30(5700K)

Model Difference: All construction and rating are the same, except CCT.

Test & Report By:

*Johnson Sun*

Engineer: Johnson Sun

Date: Jun.01,2016

Review By:

*Tommy Liang*

Manager: Tommy Liang

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Laboratory: Standard-Tech Co. Ltd Testing Center**  
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

U.S. Department of Energy

**Lighting Facts™ Uniform LM-79 Reporting Template**
**Laboratory Information:**

|                         |                         |
|-------------------------|-------------------------|
| Name of Test Laboratory | Standard-Tech Co., Ltd. |
| Date of Test Report     | Jun.01,2016             |
| Test Report No.         | STD160203NB-E           |
| Laboratory Contact Name | Tommy Liang             |

**Product Information:**

|                                                                         |                                 |     |
|-------------------------------------------------------------------------|---------------------------------|-----|
| Organization Name                                                       | CEA GROUP INTERNATIONAL CO.,LTD |     |
| Brand Name                                                              | CEA EAEC                        |     |
| Model Number                                                            | CNL5-30(2700K)                  |     |
| SKU (if available)                                                      | N/A                             |     |
| Type of Luminaire<br>(for integral lamps, list base type and lamp type) | Fuel Pump Canopy Luminaires     |     |
| Luminaire Aperture (for downlights)                                     | --                              | in. |
| Luminaire Length                                                        | --                              | mm  |
| Luminaires Width                                                        | --                              | mm  |
| Number of Units (modular products)                                      | N/A                             |     |

| Electrical Measurements: | Integrating Sphere | Goniophotometer |   |
|--------------------------|--------------------|-----------------|---|
|                          | Output             | Output          |   |
| Input Wattage            | --                 | 29.01           | W |
| Input Current            | --                 | 0.2437          | A |
| Input Voltage (ac)       | --                 | 120.0           | V |
| Power Factor             | --                 | 0.9920          |   |
| Off-State Power          | --                 | 0               | W |

**Photometric Characteristics**

|                                         |        |        |      |
|-----------------------------------------|--------|--------|------|
| Total Initial Lumen Output              | --     | 3195   | lm   |
| Initial Lumen Efficacy                  | --     | 110.13 | lm/w |
| Correlated color temperature / CCT      | 2716   | --     | K    |
| Color rendering index / CRI             | 80.0   | --     |      |
| R9 Value                                | 0      | --     |      |
| Duv                                     | 0.0010 | --     |      |
| <b>Luminous Intensity Distribution</b>  |        |        |      |
| Center beam candlepower (if applicable) | ---    | 1169   | cd   |
| Beam angle (if applicable)              |        | 101.6  | °    |
| Zonal lumens in the 0 °-60 °zone        |        | 79.7   | %    |
| Zonal lumens in the 60 °-90 °zone       |        | 19.6   | %    |
| Zonal lumens in the 90 °-120 °zone      |        | 0.4    | %    |
| Zonal lumens in the 120 °-180 °zone     |        | 0.3    | %    |

**Laboratory: Standard-Tech Co. Ltd Testing Center**
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

 Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

U.S. Department of Energy

**Lighting Facts™ Uniform LM-79 Reporting Template**
**Laboratory Information:**

|                         |                         |
|-------------------------|-------------------------|
| Name of Test Laboratory | Standard-Tech Co., Ltd. |
| Date of Test Report     | Jun.01,2016             |
| Test Report No.         | STD160203NB-E           |
| Laboratory Contact Name | Tommy Liang             |

**Product Information:**

|                                                                         |                                 |     |
|-------------------------------------------------------------------------|---------------------------------|-----|
| Organization Name                                                       | CEA GROUP INTERNATIONAL CO.,LTD |     |
| Brand Name                                                              | CEA EAEC                        |     |
| Model Number                                                            | CNL5-30(5700K)                  |     |
| SKU (if available)                                                      | N/A                             |     |
| Type of Luminaire<br>(for integral lamps, list base type and lamp type) | Fuel Pump Canopy Luminaires     |     |
| Luminaire Aperture (for downlights)                                     | --                              | in. |
| Luminaire Length                                                        | --                              | mm  |
| Luminaires Width                                                        | --                              | mm  |
| Number of Units (modular products)                                      | N/A                             |     |

|                                         | Integrating Sphere | Goniophotometer |      |
|-----------------------------------------|--------------------|-----------------|------|
| Electrical Measurements:                | Output             | Output          |      |
| Input Wattage                           | 29.42              | --              | W    |
| Input Current                           | 0.2472             | --              | A    |
| Input Voltage (ac)                      | 120.0              | --              | V    |
| Power Factor                            | 0.9916             | --              |      |
| Off-State Power                         | 0                  | --              | W    |
| Photometric Characteristics             |                    |                 |      |
| Total Initial Lumen Output              | 3275               | --              | lm   |
| Initial Lumen Efficacy                  | 111.32             | --              | lm/w |
| Correlated color temperature / CCT      | 5332               | --              | K    |
| Color rendering index / CRI             | 85.7               | --              |      |
| R9 Value                                | 22                 | --              |      |
| Duv                                     | -0.0030            | --              |      |
| Luminous Intensity Distribution         |                    |                 |      |
| Center beam candlepower (if applicable) | -----              |                 | cd   |
| Beam angle (if applicable)              |                    |                 | °    |
| Zonal lumens in the 0 °-60 °zone        |                    |                 | %    |
| Zonal lumens in the 60 °-90 °zone       |                    |                 | %    |
| Zonal lumens in the 90 °-120 °zone      |                    |                 | %    |
| Zonal lumens in the 120 °-180 °zone     |                    |                 | %    |

**Laboratory: Standard-Tech Co. Ltd Testing Center**  
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Date of Receipt            | :May.25,2016                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Date of Test               | : May.27,2016                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test item                  | : Total Luminous Flux, Luminous Distribution Intensity, Luminous Efficacy, Correlated Color Temperature, Color Rendering Index, Chromaticity Coordinate, Electrical parameters                                                                                                                                                                                                                                                                                                           |
| Reference Standard         | IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products<br>ANSI C78.377-2008 Specifications for the Chromaticity of Solid State Lighting Products<br>CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources<br>CIE 15-2004 Technical Report Colorimetry<br>IESNA LM-16-93 Practical Guide to Colorimetry of Light Source<br>IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems |
| Reference Work Instruction | QD25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Test Methods

### 1. Photometric and Electrical measurements – Light Distribution Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $1^{\circ}$  vertical intervals and  $22.5^{\circ}$  horizontal intervals.

### 2. Photometric and Electrical Measurements – Integrating Sphere Method:

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at least 5 nm intervals over the range of 380 to 780 nm.

# 1. Product Information:

|                           |                                           |
|---------------------------|-------------------------------------------|
| Brand Name                | CEA EAEC                                  |
| Model Number              | CNL5-30                                   |
| Luminaire Type            | Fuel Pump Canopy Luminaires               |
| Rated Voltage / Frequency | 100 ~ 277 Vac, 50/60Hz                    |
| Nominal Power             | 30W                                       |
| Rated Initial Lamp Lumen  | --                                        |
| Declared CCT              | 2700K,3000K,3500K,4000K,4500K,5000K,5700K |
| LED Manufacturer          | Guangdong LcLed Lighting Co.,LTD.         |
| LED Model                 | SMD LED                                   |
| Sample Receipt Date       | May.25,2016                               |
| Sample Number             | STD160203NB-E1(2700K),E2(5700K)           |

Photo



## 2.1 Electrical, Photometric and Chromaticity Measurements

(Refer to Work Instruction QD25)

IES LM-79 2008

|                  |                |                          |         |
|------------------|----------------|--------------------------|---------|
| Test date        | 2016-05-27     | Test Ambient:            | 25.2 °C |
| Test Orientation | As intended    | Stabilization Time (min) | 90      |
| Model Number     | CNL5-30(2700K) |                          |         |

### Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % |
|------------|---------------|----------------|-------------|-----------|--------------|-------|
| STD160203  | 120.0         | 60             | 0.2437      | 29.01     | 0.9920       | 8.84  |
| NB-E1      | 277.0         | 60             | 0.1150      | 28.92     | 0.9078       | 12.64 |

### Color Data:

| Parameter                   | Result              |
|-----------------------------|---------------------|
| Test Voltage (V)            | 120.0               |
| Frequency (Hz)              | 60                  |
| Color Rendering Index (CRI) | 80.0                |
| R9                          | 0                   |
| CCT (K)                     | 2716                |
| Chromaticity (x, y)         | x=0.4602 y=0.4133   |
| Chromaticity (u', v')       | u'=0.2615 v'=0.5284 |
| Duv                         | 0.0010              |

| Special Color Rendering Indices |    |     |    |
|---------------------------------|----|-----|----|
| R1                              | 77 | R9  | 0  |
| R2                              | 90 | R10 | 78 |
| R3                              | 95 | R11 | 75 |
| R4                              | 78 | R12 | 70 |
| R5                              | 79 | R13 | 80 |
| R6                              | 88 | R14 | 98 |
| R7                              | 81 | R15 | 69 |
| R8                              | 52 | --  | -- |


### Goniophotometer Method :

| Parameter                     | Result |
|-------------------------------|--------|
| Test Voltage (V)              | 120.0  |
| Frequency (Hz)                | 60     |
| Total Luminous (lm)           | 3195.0 |
| Luminous Efficacy (lm/W)      | 110.13 |
| Beam Angle °                  | 101.6  |
| Center Beam Candle Power (cd) | 1169   |

### Goniophotometer Method for 277V:

| Parameter                | Result |
|--------------------------|--------|
| Test Voltage (V)         | 277.0  |
| Frequency (Hz)           | 60     |
| Total Luminous (lm)      | 3203.2 |
| Luminous Efficacy (lm/W) | 110.76 |

**Spectral Power Distribution & Chromaticity Diagram**

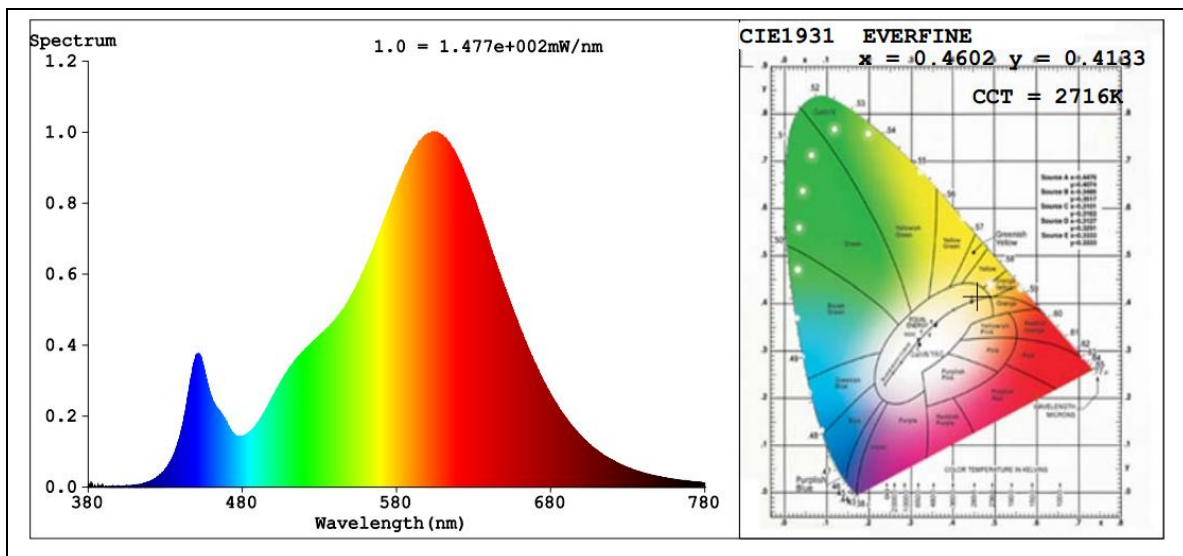

**Laboratory: Standard-Tech Co. Ltd Testing Center**  
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

## Zonal Lumen Tabulation

| Zonal Lumen Summary |         |             |
|---------------------|---------|-------------|
| Zone                | Lumens  | % Luminaire |
| 0-30                | 923.8   | 28.9%       |
| 0-40                | 1,477.4 | 46.2%       |
| 0-60                | 2,545.9 | 79.7%       |
| 60-90               | 626.1   | 19.6%       |
| 70-100              | 257.1   | 8%          |
| 90-120              | 13.5    | 0.4%        |
| 0-90                | 3,172.1 | 99.3%       |
| 90-180              | 22.7    | 0.7%        |
| 0-180               | 3,194.7 | 100%        |

| Lumens Per Zone |        |         |         |        |         |
|-----------------|--------|---------|---------|--------|---------|
| Zone            | Lumens | % Total | Zone    | Lumens | % Total |
| 0-10            | 115.4  | 3.6%    | 90-100  | 3.5    | 0.1%    |
| 10-20           | 325.3  | 10.2%   | 100-110 | 4.2    | 0.1%    |
| 20-30           | 483.1  | 15.1%   | 110-120 | 5.8    | 0.2%    |
| 30-40           | 553.6  | 17.3%   | 120-130 | 5.6    | 0.2%    |
| 40-50           | 563.4  | 17.6%   | 130-140 | 2.1    | 0.1%    |
| 50-60           | 505.1  | 15.8%   | 140-150 | 0.7    | 0%      |
| 60-70           | 372.6  | 11.7%   | 150-160 | 0.4    | 0%      |
| 70-80           | 197.4  | 6.2%    | 160-170 | 0.3    | 0%      |
| 80-90           | 56.2   | 1.8%    | 170-180 | 0.1    | 0%      |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China


Tel: 8620-3229 0320

Fax: 8620-32290422


<http://www.standard-tech.com>



## Photometric Data

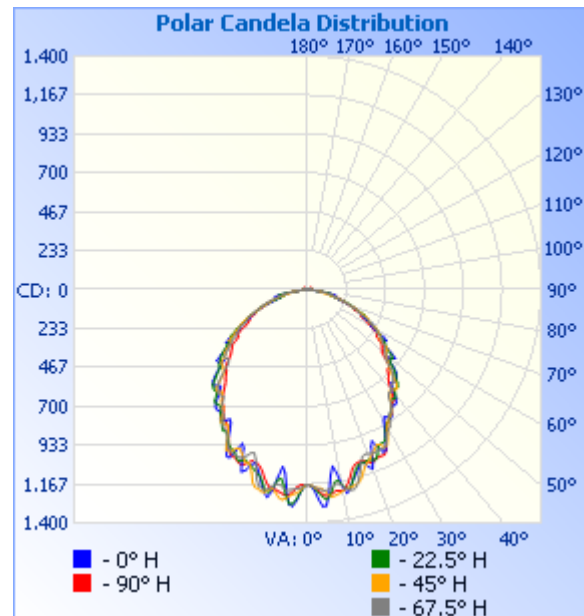

## Illuminance Plots

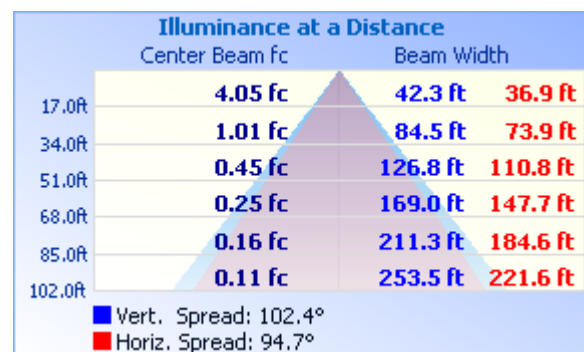

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2


Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320


Fax: 8620-32290422

<http://www.standard-tech.com>

## ISOCANDELA DIAGRAM

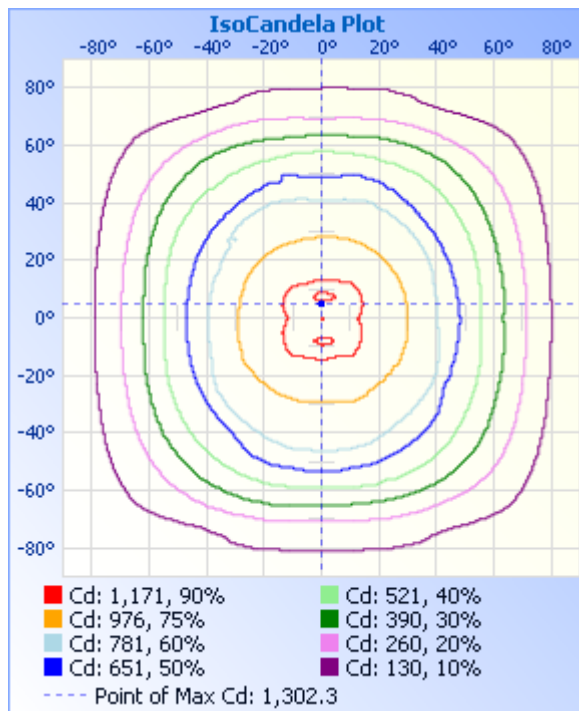

## ISOLUX DIAGRAM

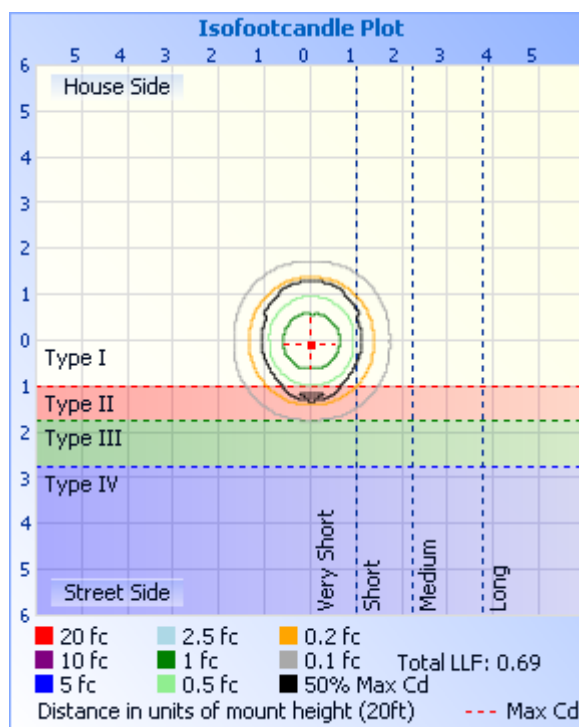

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

Candela Table - Type C

|    | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 | 360  |
|----|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|
| 0  | 1169 | 1169 | 1169 | 1169 | 1169 | 1169  | 1169 | 1169  | 1169 | 1169  | 1169 | 1169  | 1169 | 1169  | 1169 | 1169  | 1169 |
| 1  | 1178 | 1175 | 1174 | 1175 | 1177 | 1178  | 1175 | 1180  | 1180 | 1181  | 1178 | 1174  | 1170 | 1172  | 1174 | 1177  | 1178 |
| 2  | 1209 | 1194 | 1189 | 1186 | 1185 | 1186  | 1190 | 1205  | 1216 | 1213  | 1202 | 1190  | 1172 | 1173  | 1188 | 1206  | 1209 |
| 3  | 1259 | 1219 | 1192 | 1195 | 1204 | 1198  | 1195 | 1232  | 1267 | 1256  | 1221 | 1197  | 1184 | 1181  | 1201 | 1245  | 1259 |
| 4  | 1302 | 1243 | 1196 | 1204 | 1228 | 1206  | 1207 | 1267  | 1302 | 1286  | 1229 | 1200  | 1213 | 1188  | 1216 | 1291  | 1302 |
| 5  | 1301 | 1263 | 1214 | 1211 | 1241 | 1214  | 1235 | 1287  | 1291 | 1287  | 1241 | 1205  | 1231 | 1202  | 1243 | 1300  | 1301 |
| 6  | 1230 | 1252 | 1241 | 1203 | 1239 | 1207  | 1262 | 1270  | 1208 | 1247  | 1260 | 1209  | 1240 | 1205  | 1273 | 1263  | 1230 |
| 7  | 1123 | 1210 | 1250 | 1194 | 1230 | 1186  | 1263 | 1222  | 1108 | 1180  | 1268 | 1198  | 1234 | 1199  | 1276 | 1196  | 1123 |
| 8  | 1069 | 1166 | 1243 | 1178 | 1219 | 1177  | 1246 | 1176  | 1072 | 1142  | 1258 | 1183  | 1225 | 1188  | 1253 | 1142  | 1069 |
| 9  | 1114 | 1158 | 1236 | 1178 | 1221 | 1184  | 1222 | 1177  | 1136 | 1156  | 1232 | 1179  | 1216 | 1188  | 1222 | 1141  | 1114 |
| 10 | 1199 | 1186 | 1225 | 1193 | 1224 | 1205  | 1210 | 1207  | 1225 | 1208  | 1213 | 1198  | 1213 | 1198  | 1212 | 1185  | 1199 |
| 11 | 1244 | 1214 | 1217 | 1217 | 1205 | 1229  | 1214 | 1238  | 1268 | 1237  | 1220 | 1215  | 1207 | 1216  | 1206 | 1224  | 1244 |
| 12 | 1223 | 1217 | 1215 | 1228 | 1179 | 1239  | 1227 | 1239  | 1248 | 1232  | 1242 | 1227  | 1185 | 1229  | 1219 | 1228  | 1223 |
| 13 | 1186 | 1191 | 1209 | 1231 | 1145 | 1230  | 1235 | 1212  | 1210 | 1194  | 1242 | 1223  | 1156 | 1225  | 1225 | 1201  | 1186 |
| 14 | 1158 | 1150 | 1204 | 1216 | 1108 | 1213  | 1232 | 1177  | 1170 | 1162  | 1231 | 1214  | 1123 | 1207  | 1224 | 1169  | 1158 |
| 15 | 1137 | 1117 | 1195 | 1181 | 1088 | 1181  | 1223 | 1143  | 1133 | 1145  | 1226 | 1179  | 1100 | 1186  | 1219 | 1148  | 1137 |
| 16 | 1110 | 1096 | 1174 | 1139 | 1081 | 1138  | 1201 | 1120  | 1105 | 1134  | 1199 | 1122  | 1087 | 1151  | 1189 | 1133  | 1110 |
| 17 | 1087 | 1091 | 1142 | 1093 | 1076 | 1093  | 1156 | 1112  | 1086 | 1119  | 1151 | 1065  | 1085 | 1096  | 1141 | 1125  | 1087 |
| 18 | 1089 | 1089 | 1114 | 1056 | 1080 | 1062  | 1121 | 1113  | 1105 | 1110  | 1111 | 1032  | 1076 | 1048  | 1106 | 1114  | 1089 |
| 19 | 1125 | 1087 | 1097 | 1046 | 1089 | 1054  | 1109 | 1099  | 1146 | 1098  | 1098 | 1034  | 1098 | 1038  | 1090 | 1107  | 1125 |
| 20 | 1142 | 1084 | 1085 | 1047 | 1103 | 1065  | 1100 | 1090  | 1162 | 1086  | 1099 | 1058  | 1114 | 1049  | 1089 | 1103  | 1142 |
| 21 | 1096 | 1094 | 1068 | 1053 | 1105 | 1072  | 1082 | 1107  | 1105 | 1099  | 1078 | 1079  | 1122 | 1058  | 1084 | 1105  | 1096 |
| 22 | 1016 | 1097 | 1050 | 1057 | 1092 | 1073  | 1056 | 1122  | 1024 | 1108  | 1056 | 1085  | 1115 | 1066  | 1057 | 1094  | 1016 |
| 23 | 987  | 1073 | 1033 | 1055 | 1092 | 1078  | 1033 | 1105  | 1002 | 1094  | 1038 | 1085  | 1102 | 1073  | 1031 | 1076  | 987  |
| 24 | 1032 | 1038 | 1017 | 1052 | 1090 | 1072  | 1029 | 1062  | 1057 | 1071  | 1041 | 1080  | 1095 | 1072  | 1017 | 1052  | 1032 |
| 25 | 1076 | 1023 | 1025 | 1054 | 1093 | 1075  | 1042 | 1041  | 1111 | 1061  | 1061 | 1080  | 1092 | 1070  | 1021 | 1045  | 1076 |
| 26 | 1071 | 1022 | 1048 | 1055 | 1074 | 1080  | 1065 | 1041  | 1109 | 1054  | 1078 | 1069  | 1071 | 1066  | 1049 | 1044  | 1071 |
| 27 | 1034 | 1019 | 1049 | 1038 | 1042 | 1063  | 1068 | 1037  | 1068 | 1041  | 1079 | 1054  | 1045 | 1054  | 1064 | 1035  | 1034 |
| 28 | 993  | 999  | 1021 | 1011 | 1006 | 1024  | 1039 | 1016  | 1016 | 1013  | 1036 | 1028  | 1010 | 1026  | 1035 | 1008  | 993  |
| 29 | 952  | 964  | 989  | 983  | 975  | 993   | 1007 | 986   | 963  | 990   | 985  | 992   | 982  | 988   | 986  | 977   | 952  |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

|    |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 30 | 914 | 941 | 954 | 969 | 952 | 987 | 971 | 968 | 920 | 983 | 949 | 974 | 958 | 962 | 940 | 961 | 914 |
| 31 | 891 | 927 | 931 | 959 | 929 | 984 | 940 | 965 | 906 | 984 | 939 | 972 | 940 | 959 | 921 | 958 | 891 |
| 32 | 902 | 920 | 914 | 933 | 921 | 955 | 931 | 956 | 924 | 969 | 949 | 960 | 928 | 945 | 923 | 947 | 902 |
| 33 | 919 | 904 | 907 | 895 | 911 | 912 | 929 | 939 | 945 | 946 | 951 | 926 | 920 | 915 | 929 | 921 | 919 |
| 34 | 907 | 889 | 900 | 884 | 893 | 890 | 918 | 919 | 938 | 927 | 929 | 900 | 906 | 886 | 920 | 900 | 907 |
| 35 | 874 | 872 | 877 | 874 | 868 | 896 | 888 | 900 | 910 | 912 | 888 | 893 | 881 | 880 | 883 | 889 | 874 |
| 36 | 861 | 851 | 847 | 853 | 857 | 868 | 864 | 881 | 900 | 889 | 863 | 886 | 861 | 867 | 847 | 869 | 861 |
| 37 | 868 | 830 | 824 | 807 | 849 | 820 | 846 | 875 | 901 | 872 | 858 | 847 | 851 | 826 | 827 | 844 | 868 |
| 38 | 864 | 832 | 801 | 787 | 840 | 796 | 819 | 881 | 898 | 872 | 840 | 817 | 832 | 794 | 818 | 840 | 864 |
| 39 | 840 | 838 | 783 | 790 | 807 | 802 | 793 | 873 | 875 | 878 | 811 | 819 | 807 | 794 | 803 | 838 | 840 |
| 40 | 806 | 819 | 778 | 779 | 773 | 801 | 799 | 846 | 837 | 867 | 799 | 824 | 779 | 799 | 794 | 822 | 806 |
| 41 | 772 | 795 | 793 | 763 | 745 | 789 | 823 | 826 | 798 | 832 | 811 | 822 | 754 | 783 | 788 | 800 | 772 |
| 42 | 751 | 792 | 802 | 761 | 722 | 776 | 825 | 841 | 779 | 819 | 818 | 806 | 734 | 774 | 793 | 793 | 751 |
| 43 | 756 | 793 | 784 | 751 | 713 | 774 | 806 | 840 | 782 | 822 | 799 | 788 | 721 | 772 | 774 | 786 | 756 |
| 44 | 761 | 775 | 755 | 739 | 695 | 779 | 767 | 806 | 801 | 816 | 754 | 765 | 704 | 751 | 733 | 772 | 761 |
| 45 | 756 | 746 | 712 | 725 | 678 | 752 | 734 | 780 | 805 | 804 | 714 | 730 | 688 | 724 | 690 | 759 | 756 |
| 46 | 741 | 734 | 687 | 705 | 675 | 714 | 711 | 779 | 788 | 771 | 698 | 687 | 678 | 690 | 668 | 739 | 741 |
| 47 | 725 | 714 | 667 | 666 | 665 | 673 | 682 | 760 | 758 | 744 | 692 | 650 | 670 | 651 | 662 | 705 | 725 |
| 48 | 692 | 679 | 648 | 637 | 641 | 646 | 656 | 715 | 725 | 711 | 684 | 637 | 646 | 627 | 651 | 671 | 692 |
| 49 | 649 | 650 | 632 | 618 | 608 | 626 | 650 | 684 | 681 | 701 | 683 | 632 | 621 | 616 | 641 | 660 | 649 |
| 50 | 629 | 649 | 622 | 611 | 581 | 620 | 636 | 690 | 655 | 692 | 675 | 642 | 600 | 622 | 634 | 669 | 629 |
| 51 | 657 | 656 | 604 | 601 | 577 | 608 | 619 | 698 | 690 | 676 | 645 | 639 | 590 | 607 | 616 | 659 | 657 |
| 52 | 668 | 639 | 601 | 585 | 564 | 596 | 631 | 682 | 693 | 661 | 625 | 626 | 577 | 586 | 605 | 631 | 668 |
| 53 | 627 | 604 | 601 | 583 | 560 | 586 | 633 | 639 | 651 | 642 | 624 | 600 | 567 | 585 | 599 | 605 | 627 |
| 54 | 583 | 578 | 584 | 571 | 548 | 571 | 608 | 608 | 608 | 620 | 598 | 579 | 555 | 568 | 573 | 588 | 583 |
| 55 | 550 | 568 | 540 | 546 | 521 | 561 | 572 | 589 | 575 | 590 | 570 | 557 | 519 | 548 | 538 | 571 | 550 |
| 56 | 537 | 553 | 521 | 539 | 497 | 545 | 543 | 575 | 558 | 581 | 554 | 549 | 498 | 536 | 529 | 562 | 537 |
| 57 | 565 | 526 | 524 | 520 | 493 | 519 | 543 | 560 | 585 | 552 | 563 | 518 | 502 | 504 | 533 | 533 | 565 |
| 58 | 542 | 513 | 508 | 494 | 486 | 498 | 531 | 537 | 557 | 533 | 543 | 494 | 485 | 481 | 518 | 510 | 542 |
| 59 | 479 | 494 | 489 | 485 | 462 | 497 | 503 | 531 | 506 | 540 | 511 | 495 | 467 | 485 | 496 | 512 | 479 |
| 60 | 444 | 476 | 481 | 476 | 441 | 474 | 505 | 507 | 465 | 502 | 497 | 469 | 426 | 465 | 480 | 487 | 444 |
| 61 | 431 | 459 | 467 | 449 | 415 | 460 | 480 | 486 | 459 | 486 | 478 | 470 | 408 | 450 | 458 | 467 | 431 |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

|    |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 62 | 446 | 436 | 427 | 441 | 401 | 445 | 440 | 464 | 458 | 453 | 453 | 430 | 395 | 421 | 424 | 447 | 446 |
| 63 | 390 | 410 | 413 | 412 | 373 | 417 | 437 | 432 | 413 | 433 | 441 | 408 | 401 | 403 | 421 | 420 | 390 |
| 64 | 364 | 394 | 407 | 397 | 355 | 399 | 415 | 417 | 386 | 413 | 419 | 397 | 382 | 383 | 405 | 404 | 364 |
| 65 | 367 | 376 | 390 | 353 | 357 | 353 | 404 | 410 | 383 | 394 | 399 | 390 | 358 | 372 | 389 | 386 | 367 |
| 66 | 341 | 373 | 361 | 340 | 339 | 341 | 366 | 401 | 356 | 374 | 370 | 372 | 335 | 359 | 357 | 372 | 341 |
| 67 | 322 | 341 | 329 | 331 | 302 | 341 | 345 | 358 | 338 | 344 | 335 | 348 | 339 | 329 | 327 | 341 | 322 |
| 68 | 311 | 305 | 320 | 309 | 311 | 305 | 338 | 332 | 319 | 310 | 327 | 323 | 312 | 313 | 312 | 309 | 311 |
| 69 | 287 | 292 | 295 | 284 | 288 | 286 | 306 | 315 | 290 | 309 | 300 | 316 | 287 | 299 | 292 | 304 | 287 |
| 70 | 253 | 280 | 259 | 275 | 260 | 278 | 275 | 285 | 262 | 294 | 266 | 288 | 287 | 269 | 263 | 287 | 253 |
| 71 | 235 | 258 | 249 | 252 | 248 | 256 | 269 | 270 | 230 | 259 | 256 | 276 | 256 | 263 | 252 | 254 | 235 |
| 72 | 201 | 241 | 223 | 232 | 223 | 241 | 235 | 237 | 207 | 238 | 240 | 259 | 243 | 243 | 231 | 229 | 201 |
| 73 | 200 | 205 | 203 | 214 | 216 | 218 | 217 | 208 | 187 | 201 | 220 | 239 | 221 | 231 | 217 | 195 | 200 |
| 74 | 176 | 181 | 182 | 199 | 199 | 209 | 201 | 183 | 170 | 170 | 208 | 225 | 204 | 216 | 198 | 186 | 176 |
| 75 | 161 | 161 | 167 | 183 | 186 | 192 | 181 | 158 | 165 | 155 | 189 | 202 | 190 | 194 | 180 | 158 | 161 |
| 76 | 167 | 144 | 146 | 174 | 176 | 176 | 157 | 147 | 174 | 146 | 170 | 183 | 180 | 178 | 157 | 144 | 167 |
| 77 | 177 | 139 | 125 | 156 | 167 | 164 | 133 | 145 | 192 | 155 | 148 | 168 | 163 | 160 | 134 | 144 | 177 |
| 78 | 174 | 145 | 107 | 146 | 153 | 149 | 115 | 154 | 198 | 164 | 125 | 151 | 151 | 144 | 117 | 148 | 174 |
| 79 | 159 | 143 | 93  | 129 | 136 | 137 | 102 | 164 | 181 | 174 | 110 | 136 | 141 | 130 | 105 | 151 | 159 |
| 80 | 141 | 135 | 89  | 119 | 124 | 121 | 94  | 151 | 149 | 154 | 105 | 127 | 127 | 119 | 97  | 145 | 141 |
| 81 | 105 | 120 | 85  | 107 | 107 | 110 | 92  | 129 | 99  | 124 | 102 | 113 | 110 | 107 | 94  | 123 | 105 |
| 82 | 77  | 91  | 83  | 90  | 87  | 91  | 95  | 89  | 71  | 85  | 94  | 94  | 89  | 89  | 90  | 91  | 77  |
| 83 | 45  | 56  | 76  | 71  | 67  | 73  | 84  | 62  | 49  | 62  | 78  | 75  | 70  | 71  | 77  | 58  | 45  |
| 84 | 34  | 36  | 56  | 52  | 50  | 52  | 61  | 38  | 35  | 40  | 60  | 56  | 52  | 55  | 57  | 36  | 34  |
| 85 | 32  | 32  | 36  | 37  | 36  | 38  | 38  | 32  | 32  | 33  | 45  | 43  | 41  | 42  | 39  | 31  | 32  |
| 86 | 30  | 29  | 29  | 30  | 29  | 31  | 30  | 30  | 30  | 30  | 33  | 35  | 35  | 34  | 29  | 29  | 30  |
| 87 | 28  | 27  | 25  | 25  | 24  | 26  | 25  | 27  | 28  | 28  | 26  | 30  | 28  | 29  | 25  | 27  | 28  |
| 88 | 25  | 24  | 22  | 21  | 20  | 20  | 22  | 25  | 25  | 25  | 23  | 23  | 22  | 22  | 22  | 24  | 25  |
| 89 | 21  | 21  | 19  | 17  | 15  | 16  | 19  | 21  | 22  | 21  | 19  | 16  | 15  | 16  | 18  | 21  | 21  |
| 90 | 18  | 17  | 16  | 14  | 13  | 14  | 16  | 16  | 18  | 17  | 16  | 14  | 12  | 13  | 15  | 17  | 18  |
| 91 | 9   | 8   | 12  | 11  | 11  | 11  | 11  | 2   | 8   | 8   | 12  | 11  | 11  | 11  | 11  | 5   | 9   |
| 92 | 0   | 0   | 4   | 7   | 7   | 6   | 2   | 0   | 0   | 0   | 4   | 7   | 7   | 6   | 3   | 0   | 0   |
| 93 | 0   | 0   | 0   | 1   | 2   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | 2   | 1   | 0   | 0   | 0   |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

|     |   |   |   |    |    |    |   |   |   |   |   |    |    |    |   |   |   |
|-----|---|---|---|----|----|----|---|---|---|---|---|----|----|----|---|---|---|
| 94  | 0 | 0 | 0 | 0  | 0  | 0  | 0 | 1 | 0 | 0 | 0 | 0  | 0  | 0  | 0 | 0 | 0 |
| 95  | 8 | 6 | 0 | 0  | 0  | 0  | 0 | 6 | 7 | 6 | 0 | 0  | 0  | 0  | 0 | 7 | 8 |
| 96  | 8 | 6 | 0 | 0  | 0  | 0  | 1 | 5 | 7 | 5 | 0 | 0  | 0  | 0  | 0 | 6 | 8 |
| 97  | 7 | 5 | 1 | 0  | 0  | 0  | 1 | 3 | 6 | 4 | 1 | 0  | 0  | 0  | 1 | 5 | 7 |
| 98  | 6 | 4 | 1 | 0  | 0  | 0  | 0 | 2 | 4 | 3 | 0 | 0  | 0  | 0  | 1 | 4 | 6 |
| 99  | 5 | 3 | 1 | 1  | 0  | 1  | 0 | 2 | 3 | 2 | 0 | 1  | 0  | 1  | 1 | 3 | 5 |
| 100 | 4 | 2 | 0 | 2  | 3  | 3  | 0 | 1 | 2 | 1 | 0 | 3  | 2  | 3  | 0 | 2 | 4 |
| 101 | 2 | 1 | 0 | 4  | 6  | 5  | 0 | 0 | 0 | 0 | 0 | 5  | 6  | 5  | 0 | 1 | 2 |
| 102 | 1 | 0 | 0 | 8  | 10 | 8  | 1 | 0 | 0 | 0 | 1 | 8  | 9  | 8  | 0 | 0 | 1 |
| 103 | 0 | 0 | 0 | 8  | 13 | 8  | 1 | 0 | 0 | 0 | 1 | 9  | 13 | 9  | 0 | 0 | 0 |
| 104 | 0 | 0 | 1 | 8  | 13 | 9  | 1 | 0 | 0 | 0 | 1 | 9  | 14 | 9  | 1 | 0 | 0 |
| 105 | 0 | 0 | 1 | 9  | 12 | 9  | 2 | 0 | 0 | 0 | 2 | 10 | 13 | 9  | 1 | 0 | 0 |
| 106 | 0 | 0 | 2 | 9  | 12 | 9  | 2 | 0 | 0 | 0 | 2 | 10 | 13 | 9  | 2 | 0 | 0 |
| 107 | 0 | 0 | 2 | 9  | 13 | 9  | 3 | 0 | 0 | 0 | 3 | 10 | 13 | 10 | 2 | 0 | 0 |
| 108 | 0 | 0 | 2 | 9  | 13 | 9  | 3 | 0 | 0 | 0 | 3 | 10 | 13 | 10 | 2 | 0 | 0 |
| 109 | 0 | 0 | 3 | 10 | 13 | 9  | 3 | 0 | 0 | 0 | 3 | 10 | 13 | 10 | 2 | 0 | 0 |
| 110 | 0 | 0 | 3 | 9  | 13 | 9  | 3 | 0 | 0 | 0 | 3 | 10 | 13 | 10 | 3 | 0 | 0 |
| 111 | 0 | 0 | 3 | 9  | 11 | 8  | 3 | 0 | 0 | 0 | 3 | 10 | 12 | 10 | 3 | 0 | 0 |
| 112 | 0 | 0 | 3 | 8  | 10 | 8  | 3 | 0 | 0 | 0 | 3 | 9  | 12 | 10 | 3 | 0 | 0 |
| 113 | 0 | 0 | 3 | 8  | 10 | 8  | 3 | 1 | 0 | 0 | 3 | 9  | 12 | 10 | 3 | 0 | 0 |
| 114 | 0 | 0 | 3 | 8  | 10 | 8  | 3 | 0 | 0 | 0 | 3 | 10 | 12 | 10 | 3 | 0 | 0 |
| 115 | 0 | 0 | 3 | 9  | 13 | 9  | 3 | 0 | 0 | 0 | 3 | 10 | 15 | 11 | 3 | 0 | 0 |
| 116 | 0 | 0 | 3 | 11 | 25 | 11 | 3 | 0 | 0 | 0 | 3 | 12 | 23 | 13 | 3 | 0 | 0 |
| 117 | 0 | 0 | 3 | 16 | 25 | 15 | 3 | 0 | 0 | 0 | 3 | 16 | 24 | 15 | 3 | 0 | 0 |
| 118 | 0 | 0 | 3 | 17 | 22 | 17 | 3 | 0 | 0 | 0 | 3 | 16 | 23 | 16 | 3 | 0 | 0 |
| 119 | 0 | 0 | 3 | 18 | 18 | 17 | 4 | 0 | 0 | 0 | 4 | 16 | 21 | 16 | 4 | 0 | 0 |
| 120 | 0 | 0 | 4 | 17 | 21 | 16 | 4 | 0 | 0 | 0 | 4 | 17 | 21 | 16 | 4 | 0 | 0 |
| 121 | 0 | 0 | 4 | 15 | 20 | 15 | 5 | 0 | 0 | 0 | 4 | 16 | 20 | 16 | 4 | 1 | 0 |
| 122 | 0 | 0 | 5 | 15 | 15 | 15 | 5 | 0 | 0 | 0 | 4 | 16 | 18 | 16 | 4 | 0 | 0 |
| 123 | 0 | 0 | 5 | 14 | 17 | 13 | 5 | 0 | 1 | 0 | 4 | 14 | 18 | 15 | 5 | 0 | 0 |
| 124 | 0 | 0 | 5 | 15 | 14 | 13 | 5 | 0 | 1 | 0 | 4 | 14 | 16 | 14 | 5 | 0 | 0 |
| 125 | 0 | 0 | 5 | 12 | 15 | 11 | 4 | 0 | 1 | 0 | 4 | 12 | 16 | 13 | 5 | 0 | 0 |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

|     |   |   |   |    |    |    |   |   |   |   |   |    |    |    |   |   |   |
|-----|---|---|---|----|----|----|---|---|---|---|---|----|----|----|---|---|---|
| 126 | 0 | 0 | 5 | 12 | 13 | 11 | 4 | 0 | 1 | 0 | 4 | 12 | 14 | 13 | 5 | 0 | 0 |
| 127 | 1 | 0 | 4 | 11 | 12 | 9  | 3 | 0 | 1 | 0 | 4 | 11 | 14 | 11 | 4 | 0 | 1 |
| 128 | 1 | 0 | 3 | 11 | 12 | 11 | 2 | 0 | 1 | 0 | 3 | 9  | 13 | 11 | 4 | 0 | 1 |
| 129 | 1 | 0 | 3 | 10 | 11 | 10 | 2 | 0 | 1 | 0 | 3 | 11 | 11 | 11 | 4 | 0 | 1 |
| 130 | 1 | 0 | 3 | 7  | 11 | 6  | 2 | 1 | 1 | 0 | 2 | 9  | 11 | 9  | 3 | 0 | 1 |
| 131 | 1 | 0 | 2 | 8  | 9  | 7  | 1 | 1 | 1 | 0 | 2 | 7  | 12 | 7  | 3 | 0 | 1 |
| 132 | 1 | 0 | 2 | 9  | 7  | 9  | 1 | 1 | 1 | 1 | 2 | 7  | 9  | 8  | 2 | 0 | 1 |
| 133 | 1 | 0 | 2 | 6  | 9  | 6  | 1 | 1 | 1 | 1 | 1 | 8  | 7  | 8  | 2 | 0 | 1 |
| 134 | 1 | 0 | 2 | 5  | 9  | 4  | 1 | 1 | 1 | 1 | 1 | 6  | 9  | 7  | 2 | 0 | 1 |
| 135 | 1 | 0 | 2 | 4  | 6  | 4  | 1 | 1 | 1 | 1 | 1 | 5  | 9  | 5  | 2 | 1 | 1 |
| 136 | 1 | 0 | 2 | 4  | 5  | 3  | 1 | 1 | 1 | 1 | 1 | 4  | 7  | 4  | 1 | 1 | 1 |
| 137 | 1 | 0 | 1 | 3  | 4  | 3  | 1 | 1 | 1 | 1 | 1 | 3  | 6  | 4  | 1 | 1 | 1 |
| 138 | 1 | 0 | 1 | 3  | 3  | 3  | 0 | 1 | 1 | 1 | 0 | 3  | 4  | 3  | 1 | 1 | 1 |
| 139 | 1 | 0 | 1 | 3  | 3  | 2  | 0 | 1 | 1 | 1 | 0 | 2  | 4  | 3  | 1 | 1 | 1 |
| 140 | 1 | 0 | 1 | 3  | 3  | 2  | 0 | 1 | 1 | 1 | 0 | 2  | 4  | 3  | 1 | 1 | 1 |
| 141 | 1 | 0 | 1 | 3  | 3  | 2  | 0 | 1 | 1 | 1 | 0 | 2  | 4  | 3  | 1 | 1 | 1 |
| 142 | 1 | 1 | 0 | 2  | 2  | 2  | 0 | 1 | 1 | 1 | 0 | 2  | 3  | 2  | 1 | 1 | 1 |
| 143 | 1 | 1 | 1 | 2  | 2  | 2  | 0 | 1 | 1 | 1 | 0 | 2  | 3  | 2  | 0 | 1 | 1 |
| 144 | 1 | 1 | 0 | 2  | 2  | 1  | 0 | 1 | 1 | 1 | 0 | 1  | 3  | 2  | 0 | 1 | 1 |
| 145 | 1 | 1 | 0 | 2  | 2  | 1  | 1 | 1 | 1 | 1 | 0 | 1  | 2  | 1  | 0 | 1 | 1 |
| 146 | 1 | 1 | 0 | 1  | 2  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 2  | 1  | 0 | 1 | 1 |
| 147 | 1 | 1 | 0 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 2  | 1  | 0 | 1 | 1 |
| 148 | 1 | 1 | 0 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 0 | 1 | 1 |
| 149 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 0 | 1 | 1 |
| 150 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 151 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 152 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 153 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 154 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 155 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 156 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |
| 157 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 | 1 | 1 | 1  | 1  | 1  | 1 | 1 | 1 |

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

|     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 158 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 159 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 160 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 161 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 162 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 163 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 164 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 165 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 166 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 167 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 168 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 169 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 170 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 171 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 172 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 173 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 174 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 2 |
| 175 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 176 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 177 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 178 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 179 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 180 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |



## 2.2 Electrical, Photometric and Chromaticity Measurements

(Refer to Work Instruction QD25)

IES LM-79 2008

|                  |                |                          |         |
|------------------|----------------|--------------------------|---------|
| Test date        | 2016-05-27     | Test Ambient:            | 25.2 °C |
| Test Orientation | As intended    | Stabilization Time (min) | 90      |
| Model Number     | CNL5-30(5700K) |                          |         |

### Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % |
|------------|---------------|----------------|-------------|-----------|--------------|-------|
| STD160203  | 120.0         | 60             | 0.2472      | 29.42     | 0.9916       | 8.78  |
| NB-E2      | 277.0         | 60             | 0.1162      | 29.22     | 0.9078       | 12.67 |

### Sphere-Spectroradiometer Method :


| Parameter                      | Result              |
|--------------------------------|---------------------|
| Test Voltage (V)               | 120.0               |
| Frequency (Hz)                 | 60                  |
| Color Rendering Index (CRI)    | 85.7                |
| R9                             | 22                  |
| CCT (K)                        | 5332                |
| Chromaticity (x, y)            | x=0.3362 y=0.3385   |
| Chromaticity (u', v')          | u'=0.2105 v'=0.4768 |
| Duv                            | -0.0030             |
| Total Initial Lumen Output(lm) | 3275                |
| Initial Lumen Efficacy(lm/w)   | 111.32              |

| Special Color Rendering Indices |    |     |    |
|---------------------------------|----|-----|----|
| R1                              | 85 | R9  | 22 |
| R2                              | 90 | R10 | 76 |
| R3                              | 92 | R11 | 86 |
| R4                              | 86 | R12 | 65 |
| R5                              | 86 | R13 | 87 |
| R6                              | 85 | R14 | 96 |
| R7                              | 88 | R15 | 82 |
| R8                              | 72 | --  | -- |

### Sphere-Spectroradiometer Method for 277V:

| Parameter                      | Result |
|--------------------------------|--------|
| Test Voltage (V)               | 277.0  |
| Frequency (Hz)                 | 60     |
| Total Initial Lumen Output(lm) | 3283   |
| Initial Lumen Efficacy(lm/w)   | 112.35 |

**Spectral Power Distribution & Chromaticity Diagram**

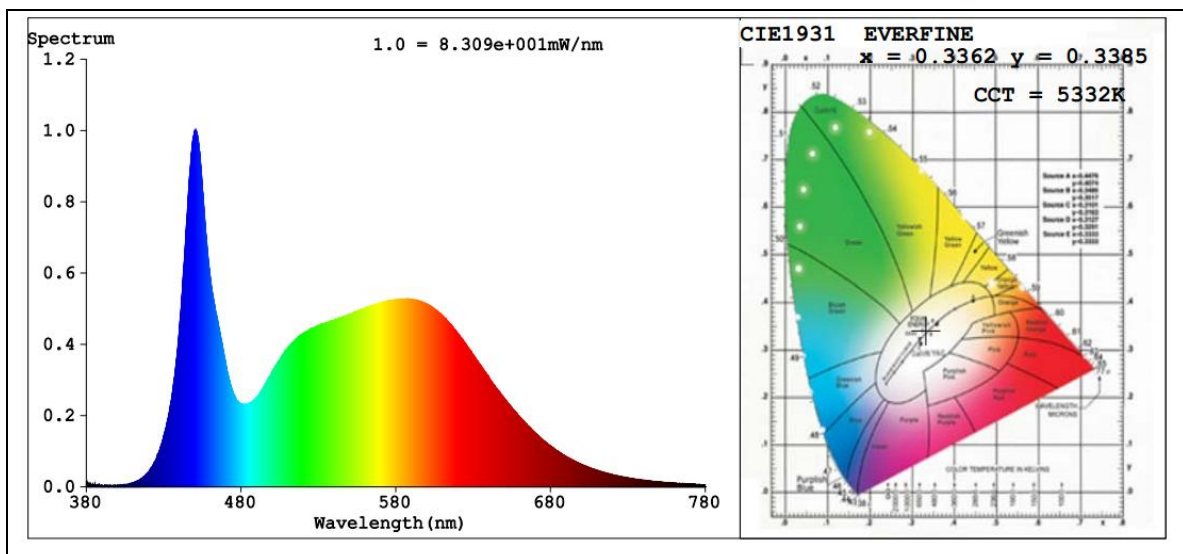

**Laboratory: Standard-Tech Co. Ltd Testing Center**

**NVLAP CODE: 201011-0**

Report Format Number STD/QR4909-H/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

**3. Test Equipment**

| Equipment ID                                                                                                                                       | Equipment Name                     | Last Calibration Date | Next Calibration Date |
|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------|-----------------------|
| ST-R-336                                                                                                                                           | 2 meter Integrating Sphere         | 2015-07-01            | 2016-06-30            |
| ST-R-331                                                                                                                                           | Spectral analysis system HAAS-2000 | 2015-07-01            | 2016-06-30            |
| D204                                                                                                                                               | Standard Lamp                      | 2015-07-01            | 2016-06-30            |
| PF2010                                                                                                                                             | Power Meter for Integrating Sphere | 2015-07-01            | 2016-06-30            |
| EE-09                                                                                                                                              | Goniophotometer system             | 2015-07-01            | 2016-06-30            |
| D908S                                                                                                                                              | Standard Lamp                      | 2015-07-01            | 2016-06-30            |
| PF210                                                                                                                                              | Power Meter for Goniophotometer    | 2015-07-01            | 2016-06-30            |
| ST-R-181A                                                                                                                                          | Temperature Tester                 | 2015-07-01            | 2016-06-30            |
| Uncertainty:<br>Photometric Measurement (Sphere):1.74%<br>Chromaticity Measurement(Sphere):14.3K<br>Photometric Measurement(Goniophotometer):1.62% |                                    |                       |                       |

**\*\*\*\*\* END OF DATASHEET PACKAGE \*\*\*\*\***