



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION



- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -25°C to 40°C and to be horizontally mounted with the LEDs facing down.

Installation

1. Pendent with 3/4 inch Conduit

1. Connect the wires threaded from conduit and Canopy. Black wire for Line, White for Neutral, Yellow Green for Ground.



2. Screw the Conduit into the hole on top of Canopy light. Installation done.

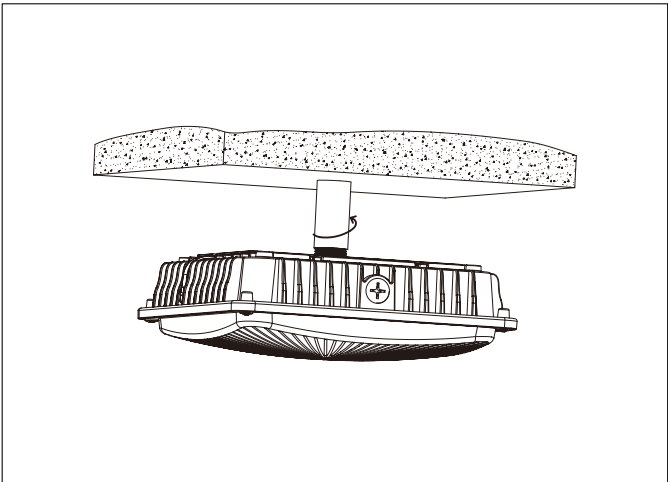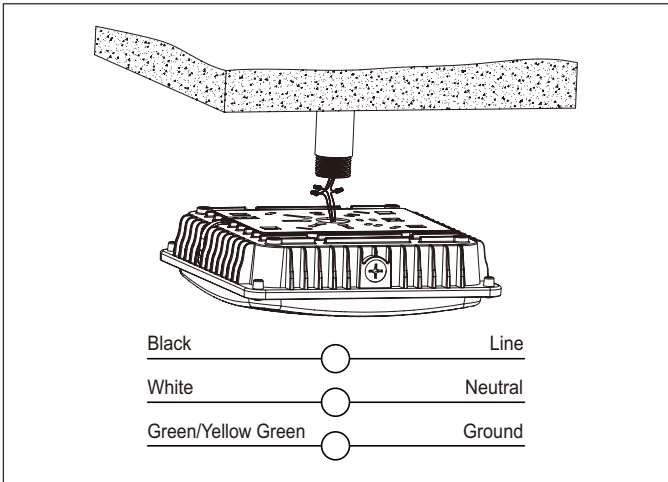

2. Blade installation

1. The blade is fixed on the LED lamp

2. LED lamps with blades on the ceiling to the ceiling, the use of screws to be fixed. installation is complete

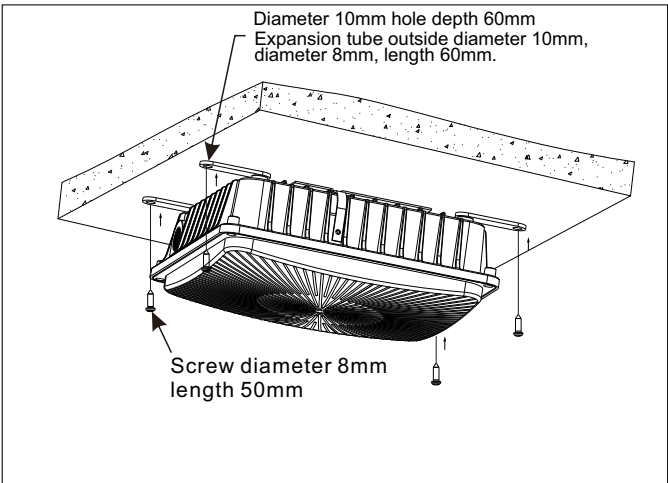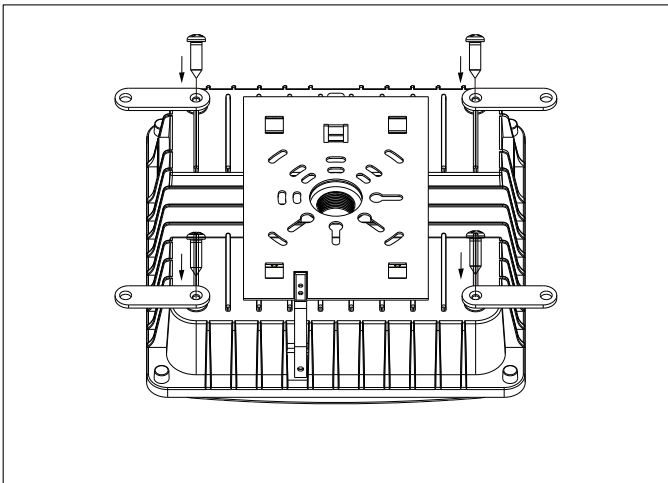


LED CANOPY


Installation Guide

3. Fixing plate installation


1. Unscrew the screws on the side of the fixed bracket, remove the ceiling back, gently pull the fixed plate.

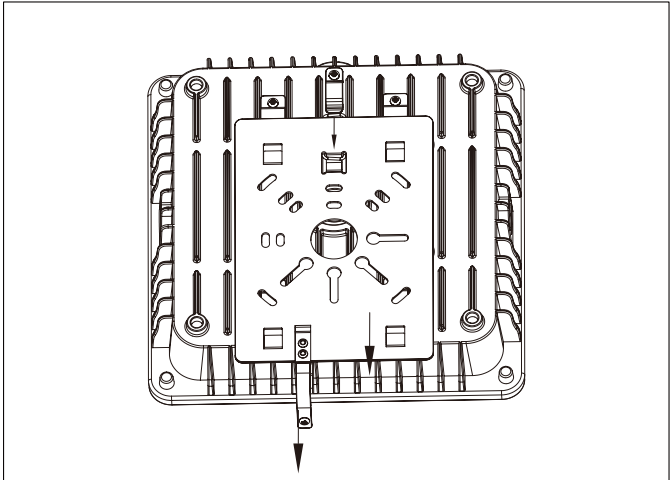


2. The fixed plate is fixed on the ceiling with a suitable screw.

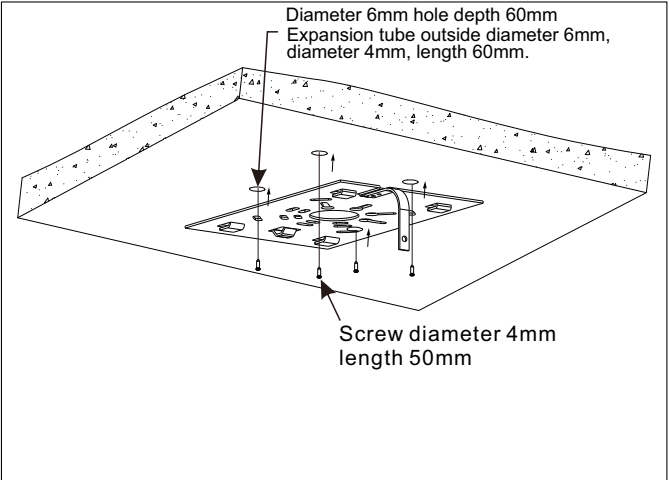

3. Connecting the wire from the side pipe and the city electric, the black line is the line, the white is neutral, the yellow green is the ground.

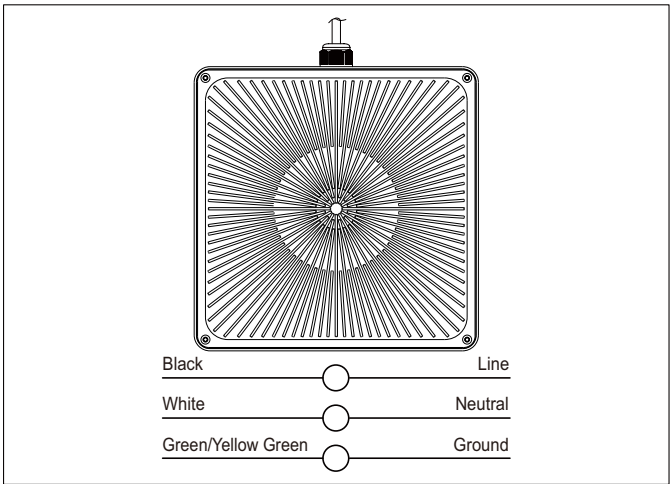

4. The Lantern back card slot and a fixed ceiling board slot, gently push the ceiling lamp to the appropriate internal card slot.

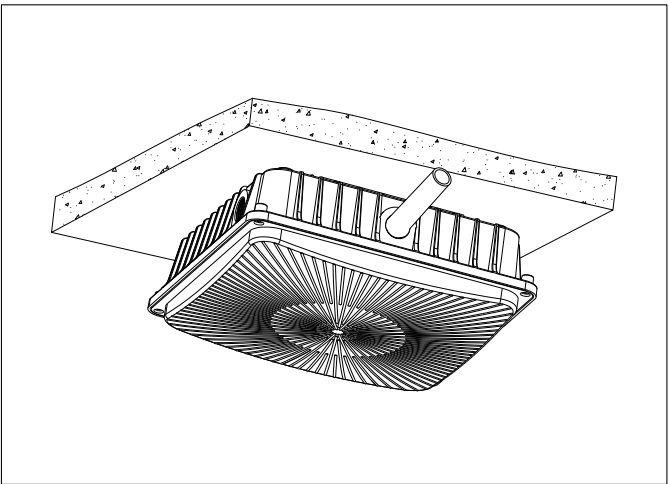

5. The side screw hole is corresponding to the convex arm screw hole of the fixing plate, and is fixed with a screw nail. Installation done.

